

OTi DALI 75/220-240/24 1-4 channel Electronically stabilized LED Power Supply

Technical Information

Edition:
May 2013
Subject to change



Technical data

| | |
|--|---|
| Reference: for LED modules: | OTi DALI 75/220-240/24 1-4 channel LINEARlight Flex, COINlight, LINEARlight colormix and 24 V modules |
| Line voltage, nominal: | 220 – 240 V _{AC} |
| Line current, nominal: | 0.375 A @ 230 V/50 Hz |
| Line frequency: | 50/60 Hz |
| Nominal output voltage: | 24 V _{DC} +1V/-0,5V |
| Nominal module wattage: | 0 - 75W, arbitrarily assigned to 1-4 output channels |
| Power factor | PF > 0,95 |
| Power losses | 8.5 W @ 230 V/50 Hz |
| Average efficiency | ≥ 87 % |
| Full load efficiency: | 90 % |
| Stand by power consumption | Typ. 0,5 W @ 230 V/50 Hz |
| Partial load: | 0W – 75W |
| Perm. voltage fluctuations: | 198 - 254 V _{AC} |
| DC voltage operation: | No |
| Inrush current: (Remark) | ≤ 36 A $t_{width} = 270\mu s$ (measured at 50% I_{peak}) |
| Max. no. of ECG @ circuit breakers 10 A (B type): | 7 |
| Max. no. of ECG @ circuit breakers 16 A (B type): | 12 |
| Control signal | DALI (1-4 DALI address, acc. IEC 62386-101 and IEC 62386-102) LED specific commands acc. IEC 62386-207 (device type 6) Touch DIM (broadcast to active channels) |
| Controls | DALI controls: e.g. DALI BASIC Touch DIM function: e.g. Touch DIM sensor |
| Dimming | PWM (244 Hz) |
| Dimming range | 0-100% |
| Safety: | IEC 61347-1, IEC 61347-2-13 |
| Performance: | IEC 62384 |
| Radio interference: | EN 55015 (A1: 2007) |
| Harmonic content: | IEC 61000-3-2 |
| Immunity: | IEC 61547 |
| Temperature range: | -20 °C to +50 °C |
| Max. case temperature on T _c | 75 °C |
| Surge capability | L-N: 2kV |
| ECG Life time: (Remark) | 50.000h at $t_{case} = +70$ °C at t_c point and 10% failure rate |


OTi DALI 75/220-240/24 1-4 channel Electronically stabilized LED Power Supply

Technical Information

Edition:
May 2013
Subject to change


| | |
|---|--|
| Galvanic insulation between primary and secondary side: | 3,75 kV _{rms} |
| Non-load proof: | Yes |
| Short circuit protection: | Autom. shutoff, reversible |
| Overload protection: | Autom. shutoff, reversible |
| Overheating protection: | Autom. shutoff, reversible |
| Wiring: | |
| Wire cross section, primary: | 2 x 0,5 - 2,5 mm ² |
| Main wiring | NYM 3x1,5 mm ² ; NYM 5*1,5 mm ² ; H05VV-F; |
| DALI, Touch DIM interface | A05VV-F |
| Secondary: | 3 x 0,5 – 2,5 mm ² |
| Wire cross section, secondary: | H03VV-F; H05VV-F; A03VV-F; A05VV-F LINEARlight POWER Flex, LINEARlight DRAGON, COINlight OSTAR, etc. |
| Max. cable length | 10m with 2,5 mm ² massive leads |
| Geometry (l x b x h): | 220 mm x 47 mm x 44 mm |
| Approvals: | CE   |
| Marks | MM, F |

Geometry

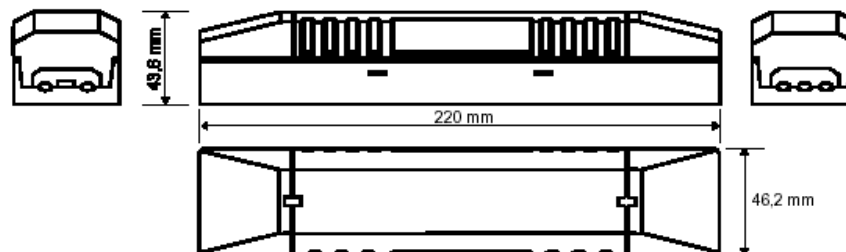

for ceiling apertures with diameter > 65mm

Measurements of mounting holes:

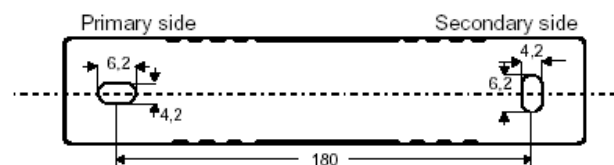

OTi DALI 75/220-240/24 1-4 channel Electronically stabilized LED Power Supply





Technical Information

Edition:
May 2013
Subject to change


Wiring diagram

1) Control via DALI control e.g. DALI BASIC:


Number of DALI addresses can be set via 2 Dip switches at the secondary side of the power supply. The DALI address would be set after a power on cycle.

| | | | |
|---|----|--|--------|
| 1-channel device (1 DALI address): 75 W at channel 1 | ON |  | 2 1 |
| 2- channel device (2 DALI addresses): 75 W split at channel 1 and 2 | ON |  | 2 1 |
| 3- channel device (3 DALI addresses): 75 W split at channel 1, 2 and 3 | ON |  | 2 1 |
| 4- channel device (4 DALI addresses): 75 W split at channel 1, 2, 3 and 4 | ON |  | 2 1 |

OTi DALI 75 with 4 DALI addresses

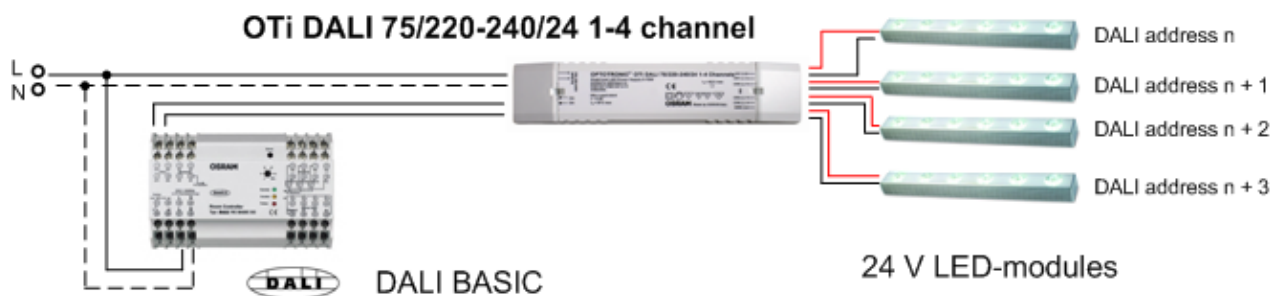

OTi DALI 75 with 1 DALI address

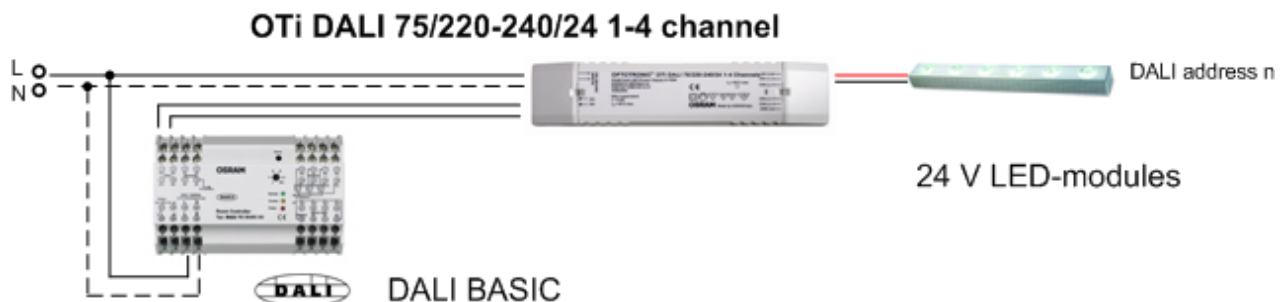


OTi DALI 75/220-240/24 1-4 channel Electronically stabilized LED Power Supply

Technical Information

Edition:
May 2013
Subject to change

2) Control via Touch DIM

Common control of all active channels (depending on DIP switch position, see 1)

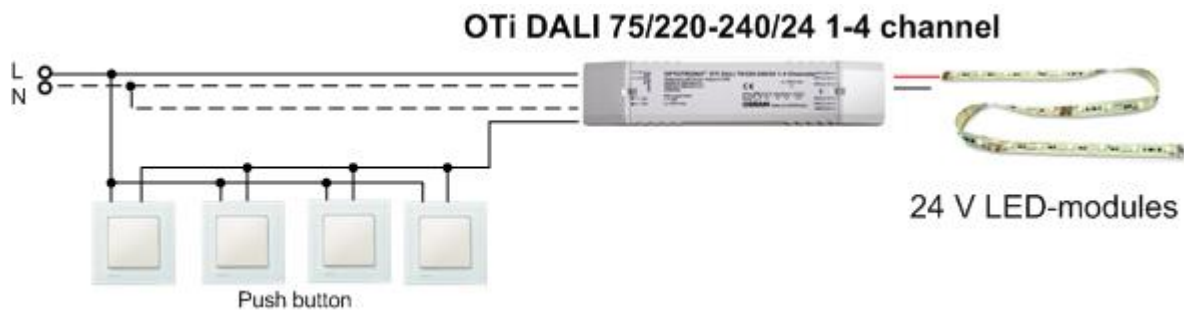

Installations notes

The luminaire manufacturer is responsible for providing the required clearances and creepage distances and also for the protection against electrical shock, especially for the line and load wires.

Instruction sheet

Please consult the instruction sheet for further important information on dimming characteristic, wire stripping and wiring limitations in system installations. The instruction sheet is enclosed to the device or available upon request.